

[Bidder's Letterhead]


[Date]

To: Tarlac State University

Re: [Invitation to Bid No.]

BILL OF QUANTITIES

Item No.	Work Description	Materials, supplies, etc.		Work Item		Direct Cost	Indirect Cost	Total Direct & Indirect Cost	Value Added Tax	Total Cost	
		Quantity	Unit	Quantity	Unit	Materials, Labor, & Equipment	Overhead, Contingencies, Miscellaneous, & Profit				
(1)	(2)	(3)	(4)	(5)	(6)	(7)	(8)	(9)	(10)	(11)	
1	General Requirements										
1.1	Mobilization, Demobilization, and Temporary Facilities (water, electricity, bunkhouse, field office, enclosure/fence, storage, billboard, etc.)			1.00	lot						
1.2	Construction Occupational Safety & Health - COSH Program New Normal (PPE, Safety Signages, etc.)			1.00	lot						
1.3	Dismantling, Hauling and Disposal of Existing Ficem Board Roof Eaves including framing			1.00	lot						
	Sub-Total										
2	Repainting Works										
2.1	Off-White Semi Gloss Latex Paint (scrapping of old paint, surface preparation, primer, and top coats)			3,536.58	m ²						
2.2	Tera Cotta Red Semi Gloss Latex Paint (scrapping of old paint, surface preparation, primer, and top coats)			400.70	m ²						
2.3	Gray Semi Gloss Latex Paint (scrapping of old paint, surface preparation, primer, and top coats)			22.85	m ²						
2.4	Acrylic Emulsion Paint (surface preparation, application of sanded grout, and top coats of exterior wall)			133.65	m ²						
2.5	Flat Latex Smooth Paint Finish on Balcony Ceiling (scrapping of old paint, surface preparation, primer, and top coats)			35.00	m ²						

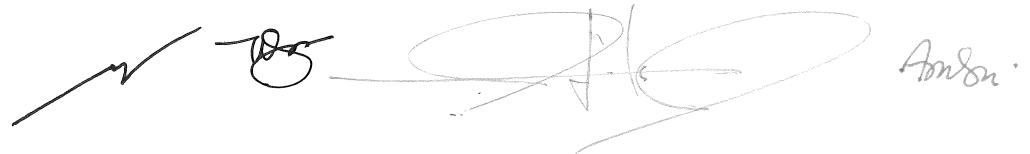


2.6	Enamel Paint Finish on Porte Cochere, Steel Louvers and ACU Framing (surface preparation, removal, scraping & cleaning of old paints, primer, and top coats)	705.90	m ²					
2.7	Epoxy Primer Gray Paint Finish on 5th floor Skylight, Left Exit Area and Service Area roof framing including g.i pipe posts, steel matting partitions (surface preparation, removal, scraping & cleaning of old paints and top coats)	200.00	m ²					
2.8	Gloss, Acrylic, Water Based Paint on Service Area roof and Left Exit Area roof (scrapping of old paint, surface preparation, primer, and top coats)	81.48	m ²					
2.9	Waterproofing for concrete gutter and 5th floor concrete slab balcony (surface preparation, application of 5 coats of cementitious waterproofing)	202.78	m					
Sub-Total								
3	Roofing Works							
3.1	4.5mm thk Solid Polycarbonate Sheet including 2x1/8" thk aluminum flat bar including silicone sealant and fasteners	81.38	m ²					
3.2	0.5mm thk. Pre-Painted Longspan Rib-type Roofing including fasteners	613.31	m ²					
3.3	0.5mm thk. Pre-Painted Longspan Rib-type Curved Roofing including fasteners	294.34	m ²					
3.4	0.5mm thk. x 24" Pre-Painted G.I. Sheet Fascia including fasteners	108.64	m					
3.5	0.5mm thk. x 24" Pre-Painted G.I. Sheet Ridge Roll including fasteners	13.64	m					
3.6	0.5mm thk. x 24" Pre-Painted G.I. Sheet Wall and End Flashing (including fasteners, silicone & etc.)	92.93	m					
3.7	Installation of Fascia Framing System made of 2" x 10" x 1.5mm thk & 2" x 4" x 1.5mm thk C-Purlins	76.10	m					
Sub-Total								
4	Repair Works							
4.1	Installation of 0.50 mm thk. Pre-Painted Spandrel including framing, air ventilation, and mouldings	76.83	m ²					
4.2	Fabrication and Installation of W2 2.50m x 3.60m Glass Wall Partition with 6mm thk. Clear Glass and Analok Frame	1.00	set					
4.3	Replacement and Installation of 6mm thk x 0.55m x 0.65m Clear Glass of W1	1.00	set					
4.4	Replacement and Installation of 6mm thk x 0.60m x 0.60m Clear Glass of W3	1.00	set					





4.5	Replacement and Installation of 6mm thk x 0.60m x 0.60m Clear Glass of W4		11.00	set					
4.6	Replacement and Installation of 6mm thk x 0.60m x 0.60m Clear Glass of W5		2.00	set					
4.7	Replacement and Installation of 6mm thk x 0.60m x 0.60m Clear Glass of W6		4.00	set					
4.8	Repair and Polishing of Stainless Steel "UNIVERSITY HOTEL" Lettering		1.00	lot					
4.9	Repair and re-painting of Roll-up door, damaged z-bar and analok window framings		1.00	lot					
									Sub-Total
Total Bid Price			(State total amount of Bid in words)						(Total amount in figures)

[Signature]
 [Name of Authorized Signatory]
 [Position/Title of Authorized Signatory]

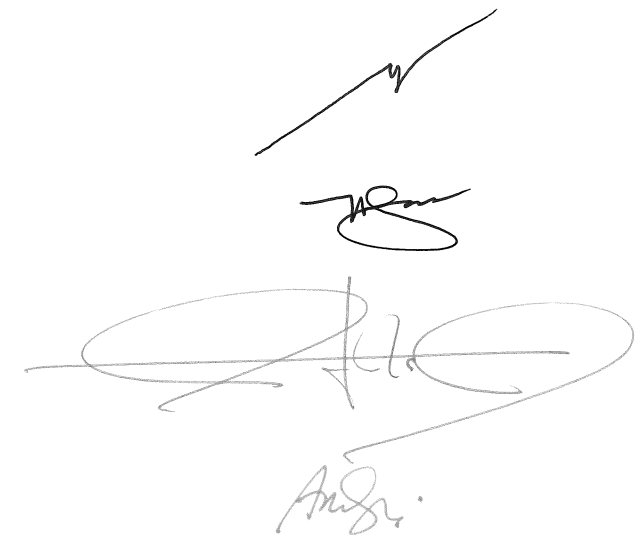

The image shows four distinct handwritten signatures or initials in black ink, arranged vertically. The top signature is a simple, sharp hook-like stroke. The second is a more complex, cursive signature. The third is a large, stylized signature with a prominent loop. The fourth is a smaller, more legible signature that appears to read 'Andri'.